




LV20n

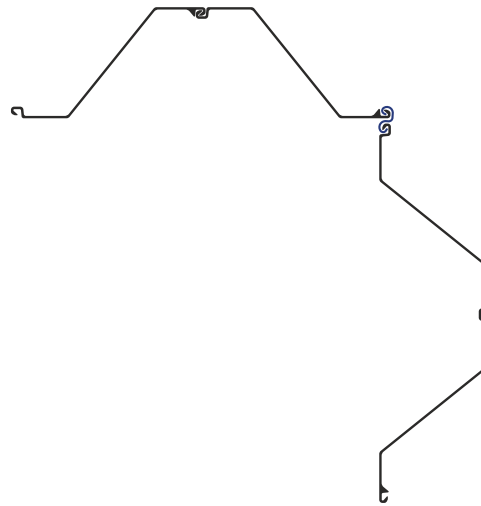

For Larssen Z sheet piles



SteelWall clutch bar LV20n

Application

Corners with Larssen Z sheet piles

Properties	metric	imperial
Steel grade:	S355	S355
Length:	11.8 m, 18 m	38.7 ft, 59 ft
Steel thickness:	8 mm	0.32"
Theoretical weight:	13.8 kg/m	9.3 lbs/ft
Max. tensile strength:	~600 kN/m	~3.43 kips/in
Single drive:	no	no

Advantages

Rotation ~30-150°

Easy to thread, separate and drive

SteelWall clutch bars generally comply with the European standards and are manufactured in certified steel rolling and steel extrusion mills. All figures are approximate and may vary. Bar twists are possible up to 0.025"/ft. Tolerance of steel thickness $\pm 0.04"$. Length tolerance $\pm 7.9"$. Degree details refer to the clutch bar axes. Welding base of LPB and FD clutches can be straight or bevelled. We reserve the right to make technical changes. We refer to DIN EN 12063.