
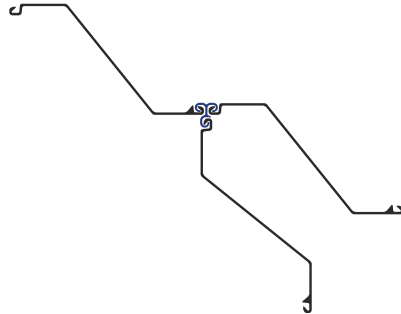


### For Larsen Z sheet piles



### SteelWall clutch bar LOTn

#### Application

T-connection

#### Properties

	metric	imperial
Steel grade:	S355	S355
Length:	on request	on request
Steel thickness:	8 mm	0.32"
Theoretical weight:	17.2 kg/m	11.6 lbs/ft

Suitable for single drive: no

SteelWall clutch bars generally comply with the European standards and are manufactured in certified steel rolling and steel extrusion mills. All figures are approximate and may vary. Bar twists are possible up to 0.025" per foot (2 mm per meter). Tolerance of steel thickness  $\pm 0.04"$  ( $\pm 1$  mm). Length tolerance up to  $\pm 7.9"$  ( $\pm 200$  mm). Degree details refer to the clutch bar axes. We reserve the right to make technical changes. We refer to DIN EN 12063. Please check the sheet pile interlocks with a physical sample section of the desired clutch bar for compatibility.